

DEPARTMENT OF PERMITTING, ENVIRONMENT, AND REGULATORY AFFAIRS (PERA) BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/pera/

Cytec Industries, Inc. 1950 Lake Park Drive Smyrna, GA 30080

Score:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County PERA -Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. PERA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code. This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Uvekol S Laminated Glass Interlayer

APPROVAL DOCUMENT: Drawing No. 11-235, titled "Uvekol S Laminated Glass", sheet 1 of 1, dated 01/22/2010, with last revision dated 12/08/2011, prepared by Tilteco, Inc., signed and sealed by Walter A. Tillit Jr., P.E., bearing the Miami-Dade County Product Control revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: None.

LABELING: Glass lites laminated under this Product Approval shall be permanently marked in a corner of the glass with: a) Laminator identification mark, b) Glass standard specifications, c) MDCA, standing for Miami Dade County Approved and d) Uvekol S.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official. This NOA revises NOA # 10-0331.02 and consists of this page, evidence page E-1, as well as approval document mentioned above.

The submitted documentation was reviewed by Carlos M. Utrera, P.E.

MIAMIDADE COUNTY APPROVED

04/04/2012

NOA No: 12-0130.01 Expiration Date: February 08, 2014 Approval Date: April 12, 2012

Page 1

NOTICE OF ACCEPTANCE: EVIDENCE PAGE

A. DRAWING

1. Drawing No. 11-235, titled "Uvekol S Laminated Glass", sheet 1 of 1, dated 01/22/2010, with last revision dated 12/08/2011, prepared by Tilteco, Inc., signed and sealed by Walter A. Tillit Jr., P.E.

B. TEST REPORTS "Submitted under NOA # 10-0331.02"

Laminated Glass with Uvekol S Interlayer:

| | Test Report | Test Standard | Test Date | Signature |
|-----------|--------------|----------------------|------------------|-------------------------|
| 1. | TEL 01630091 | ASTM D635-03 | 03/25/09 | Lyndon F. Schmidt, P.E. |
| 2. | TEL 01630093 | ASTM D2843-99 | 03/25/09 | Lyndon F. Schmidt, P.E. |
| 3. | TEL 01630112 | ASTM G155-04, C158-0 | 2 03/25/09 | Lyndon F. Schmidt, P.E. |

Uvekol S Interlayer:

| | Test Report | Test Standard | Test Date | Signature |
|-----------|--------------|---------------|-----------|-------------------------|
| 4. | TEL 01630095 | ASTM D635-03 | 03/25/09 | Lyndon F. Schmidt, P.E. |
| 5. | TEL 01630092 | ASTM D1929-96 | 03/25/09 | Lyndon F. Schmidt, P.E. |
| 6. | TEL 01630094 | ASTM D2843-99 | 03/25/09 | Lyndon F. Schmidt, P.E. |

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Permitting, Environment, and Regulatory Affairs (PERA)

D. MATERIAL CERTIFICATIONS

1. None.


E. STATEMENTS

1. Statement letter of code conformance to 2007 and 2010 FBC, issued by Tilteco, Inc., dated 01/19/2012, signed and sealed by Walter A. Tillit Jr., P.E.

/ Carlos M. Utrera, P.E. Product Control Examiner NOA No 12-0130.01

Expiration Date: February 08, 2014

Approval Date: April 12, 2012

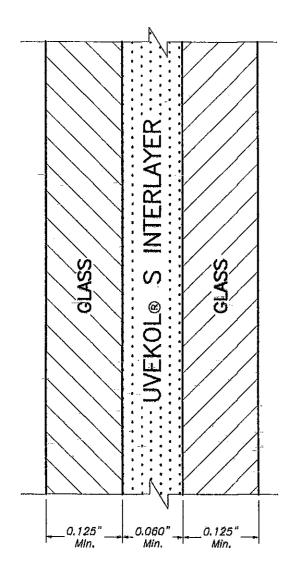

· 1 .

CROSS SECTION

DESCRIPTION:

A LAMINATED GLASS CONSISTING OF TWO (2) LITES OF GLASS WITH A CURED UVEKOL® S INTERLAYER BY CYTEC INDUSTRIES, INC. UVEKOL® S INTERLAYER IS A LIQUID RESIN USED TO LAMINATE GLASS. IT CURES UPON EXPOSURE TO UV LIGHT AND IN THE ABSENCE OF OXYGEN. AFTER IT IS PUMPED INTO THE A FORMED SPACE BETWEEN TWO LAYERS OF GLASS AND CURED FOR 20 TO 30 MINUTES. THE CURED RESIN BECOMES THE INTERLAYER OF LAMINATED GLASS.

MATERIAL CHARACTERISTICS

| TEST TITLE | DESIGNATION | TEST_RESULTS |
|---|--------------------------------|--|
| RATE OF BURNING PLASTICS | ASTM D-635-03 | 0.92 in/min. $<$ 1.0 in/Min (C-1 & CC1) (1) 0.00 in/min. $<$ 1.0 in/Min (C-1 & CC1) (2) |
| SMOKE DENSITY RATING | ASTM D-2843-99 | 10.0% ACTUAL < 75% ALLOWED (1) 0.9% ACTUAL < 75% ALLOWED (2) |
| SELF IGNITION TEMPERATURE | ASTM D-1929-96 | 734° F ACTUAL > 650° F MINIMUM ALLOWED (1) |
| XENON ARC ACCELERATED WEATHERING FLEXURAL MODULUS | ASTM C-155-04 ASTM C-158-02 | WEATHERING * (2) BEFORE AFTER 2948 psi. 3251 psi. (9.33% DIFFERENCE < 10% MAXIMUM DIFFERENCE) |

- * WEATHERING PER SECTION 2612 OF THE FLORIDA BUILDING CODE 2007 & 2010 EDITIONS. (1) UVEKOL ONLY.
- (2) LAMINATED GLASS WITH UVEKOL.

USE:

LAMINATED GLASS WITH UVEKOL® S FABRICATED BY AN APPROVED LAMINATOR CAN BE USED AS A COMPONENT OF BUILDING SYSTEMS AFTER HAVING A VALID AND CURRENT PRODUCT CONTROL NOTICE ACCEPTANCE.
A LIST OF APPROVED LAMINATORS IS KEPT ON FILE WITH THIS OFFICE, UVEKOL® S BY ITSELF DOES NOT COMPLY WITH THE PLASTIC REQUIREMENT OF THE FLORIDA BUILDING CODE, THEREFORE IT SHALL BE COVERED BY GLASS ON BOTH SIDES.

NOTE

THIS IS COMPONENT APPROVAL AND DOES NOT INCLUDE A STRUCTURAL PERFORMANCE EVALUATION. SYSTEMS INCORPORATING LAMINATED GLASS WITH UVEKOL INTERLAYER SHALL APPLY FOR AN NOA TO THIS OFFICE AND SHALL SUBMIT TEST REPORTS AND OTHER REQUIRED DOCUMENTS SHOWING THAT THE SYSTEM USING THIS COMPONENT WILL RESIST THE LOADS ACCORDING TO CHAPTER 16 OF THE 2007 & 2010 EDITIONS OF THE FLORIDA BUILDING CODE.

